



FREEBIRDS
WORLD BURRITO
1811 HWY 287 N. STE. 100
MANSFIELD, TX. 76063

TABS 2026001516

GENERAL NOTES

1. ALL CONTRACTORS SHALL VISIT THE SITE AND BECOME COMPLETELY FAMILIAR WITH CONDITIONS AFFECTING THE WORK. NO CONTRACTUAL ADJUSTMENT SHALL BE MADE DUE TO CONTRACTORS' LACK OF FULL KNOWLEDGE OF SITE CONDITIONS.
2. ALL WORK SHALL COMPLY WITH FEDERAL, STATE AND LOCAL CODES AND ORDINANCES, INCLUDING ADA, AND SHALL BE DONE TO THE HIGHEST STANDARDS OF CRAFTSMANSHIP BY JOURNEYMEN OF THE RESPECTIVE TRADES.
3. THE CONTRACTOR SHALL RECOGNIZE THAT THE ARCHITECT & OWNER SHALL HAVE THE RIGHT OF APPROVAL OF ALL MATERIALS AND EQUIPMENT INSTALLED ON THE PROJECT. ANY WORK, MATERIALS, OR EQUIPMENT DISAPPROVED BY THE ARCHITECT OR THE OWNER SHALL BE REMOVED AND REPLACED AT THE CONTRACTOR'S EXPENSE.
4. ANY SUBSTITUTIONS FOR SPECIFIED ITEMS MUST BE APPROVED BY ARCHITECT OR OWNER PRIOR TO ORDERING. FAILURE ON THE PART OF THE CONTRACTOR, OR SUB CONTRACTORS, TO ORDER SPECIFIED MATERIALS IN A TIMELY MANNER WILL NOT CONSTITUTE SUBSTITUTIONS.
5. PRIOR TO EACH REQUEST FOR PAYMENT, THE CONTRACTOR SHALL SUPPLY THE OWNER WITH RELEASE OF LIENS FROM EACH AND EVERY SUBCONTRACTOR AND SUPPLIER OF MATERIAL AND EQUIPMENT USED AND INSTALLED ON THE PROJECT, AS WELL AS A RELEASE OF LIEN FOR HIS OWN WORK ON THE PROJECT.
6. WITHIN 7 DAYS AFTER EXECUTION OF THE CONTRACT, CONTRACTOR SHALL SUBMIT TO OWNER A PLANNED PROGRESS SCHEDULE, SHOWING SUBDIVISION OF CONTRACT INTO ITEMS OF CONSTRUCTION, WITH QUANTITIES AND PRICES. PROGRESS PAYMENTS WILL BE RECOMMENDED ON THIS BASIS. VALUE TO OWNER OF IN-PLACE WORK. NO PAYMENT WILL BE MADE TO CONTRACTOR UNTIL SCHEDULE HAS BEEN SUBMITTED.
7. CONTRACTOR SHALL DESIGNATE, WITH APPROVAL OF PROPERTY MANAGER, LOCATION OF ANY SHED, DUMPSTER, STAFFING AND/OR WORK AREA. CONTRACTOR SHALL TAKE ALL REASONABLE AND POSSIBLE CARE TO INSURE THAT AREAS ON THE SITE OUTSIDE SUCH DESIGNATED AREAS REMAIN UNDISTURBED AND ACCESSIBLE.
8. CONTRACTOR SHALL MAINTAIN A REASONABLE CLEAN SITE. DEBRIS AND EXCESS MATERIALS SHALL BE REMOVED FROM THE SITE ON A REGULAR BASIS.
9. CONTRACTOR SHALL TURN OVER WORK TO OWNER IN IMMACULATE CONDITION. CLEANING INCLUDES REMOVAL OF ADHESIVE RESIDUE, SMUDGES, MARKS, FINGERPRINTS, DIRT, PAINT SPOTS, DUST LINT, RUST, DISCOLORATION AND ANY OTHER FOREIGN MATTER.
10. CONTRACTOR SHALL WARRANT ALL WORK, MATERIAL AND EQUIPMENT USED AND INSTALLED ON THE PROJECT FOR A PERIOD OF ONE YEAR FROM THE DATE OF SUBSTANTIAL COMPLETION. CONTRACTOR SHALL PROVIDE TO TENANT COPIES OF ALL GUARANTEES, WARRANTIES, INSTRUCTIONS, CLEANING INFORMATION AND MANUALS FOR ANY INSTALLED EQUIPMENT, MATERIALS OR SYSTEMS.
11. DRAWINGS AND SPECIFICATIONS.
 - A. CONTRACTOR IS RESPONSIBLE FOR THOROUGHLY REVIEWING DRAWINGS AND FOR CONTACTING THE ARCHITECT IN ORDER TO CLARIFY ANY DISCREPANCIES FOUND THEREIN.
 - B. TERMS SUCH AS "AS SHOWN," "AS INDICATED," OR "AS NOTED" MEAN THERE ARE ADDITIONAL REQUIREMENTS GIVEN ELSEWHERE IN THE CONTRACT DOCUMENTS.
 - C. CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS, SERVICES, AND MECHANICAL/ELECTRICAL SYSTEMS. CONTACT ARCHITECT PRIOR TO BID DATE IF THERE IS ANY CONFLICT BETWEEN THESE DRAWINGS AND ACTUAL SITE CONDITIONS.
12. CONTRACTOR SHALL SUBMIT, MINIMUM IN TRIPLICATE, SHOP DRAWINGS AND/OR SHEETS FOR ALL MILLWORK, STONE AND METAL WORK, DOORS AND WINDOWS, HARDWARE, FIXTURES AND EQUIPMENT BEING INSTALLED ON PROJECT FOR ARCHITECT/OWNER'S APPROVAL. APPROVED SUBMITTALS SHALL SUPERSEDE DRAWINGS AND SPECIFICATIONS.
13. CONTRACTOR SHALL PROTECT ALL WORK AS REQUIRED TO AVOID DAMAGE, MARKING OR STAINING BY INSTALLERS OF SUBSEQUENT WORK IN SAME AREA. ANY SUCH DAMAGED MATERIALS MUST BE REPLACED OR REFINISHED AT CONTRACTOR'S EXPENSE.
14. CONCRETE PLACEMENT SHALL BE A MINIMUM OF 3,000 PSI W/3% STEEL REINFORCING 18" O.C. EA. WAY, OVER A POLY VAPOR BARRIER.
15. CONCRETE CUTTING SHALL BE IN SUCH A MANNER AS TO PROTECT EXISTING REINFORCING. ANY REINFORCING CUT SHALL BE SPLICED & RETURNED TO MAT UPON REPLACEMENT OF CONCRETE. SLAB REPLACEMENT SHALL BE DOWELED W/3% BARS A MIN. OF 6" INTO EXISTING SLAB.
16. ALL CONSTRUCTION SHALL COMPLY WITH AMERICAN WITH DISABILITIES ACT (ADA) LEGISLATION, TEXAS ACCESSIBILITY CODE, ALL APPLICABLE CODES & GOVERNMENTAL REGULATIONS.
17. ALL CONDENSATE DRAINS FROM ROOFTOP MOUNTED A/C UNITS SHALL BE IN COPPER, SHALL BE WITHIN THE DEMISED AREA & SHALL BE CAUSED TO EMPTY INTO SANITARY SEWER IN COMPLIANCE W/ CITY CODES.
18. DO NOT CUT ANY GRADE BEAMS WITHOUT WRITTEN APPROVAL OF LANDLORD AND LANDLORD'S ENGINEER.

CONSTRUCTION NOTES

1. ALL DIMENSIONS SHOWN TO FACE OF INTERIOR WALLS ARE STUD DIMENSIONS, UNLESS NOTED OTHERWISE.
2. NEW INTERIOR WALL FRAMING SHALL BE 3-6/8" X 26 GA OR 6" OR 8" X 22 GA METAL STUDS @ 16" O.C.
3. PROVIDE FIRE-RETARDANT 2x SOLID BLOCKING IN WALLS AS REQUIRED FOR REINFORCEMENT OF ALL GRAB BARS, RESTROOM FIXTURES, PLUMBING LINES, WALL BUMPERS, ETC.
4. ALL EXIT DOORS SHALL BE OPERABLE FROM THE INSIDE WITHOUT ANY SPECIAL KNOWLEDGE OR EFFORT OR THE USE OF A KEY.
5. ALL EXTERIOR DOORS SHALL BE WEATHERSTRIPPED. ALL EXTERIOR JOINTS AROUND DOOR FRAMES & WINDOWS & AT ALL PENETRATIONS THROUGH BUILDING ENVELOPE SHALL BE SEALED USING SEALANT & CAULKING. ADDITIONALLY, FOAM INSULATION SHALL BE PROVIDED IN & AROUND ALL WINDOW DOOR FRAMES WHERE METAL MEETS WOOD FRAMING PLUS ALL EXTERIOR WALL OPENINGS/PENETRATIONS.
6. ALL GLAZING WITHIN 48" OF DOORS & 18" FROM FINISHED FLOOR SHALL BE TEMPERED INCLUDING GLAZING OF DOORS.
7. POST OCCUPANCY LOAD SIGN IN CONSPICUOUS PLACE NEAR MAIN EXITS AT 6'-10" A.F.F. PROVIDE TOP & BOTTOM AND CAULK AROUND ALL SIDES.
8. ALL FINISH SURFACES SHALL HAVE A FLAME SPREAD CLASSIFICATION OF CLASS III OR HIGHER (FLAME SPREAD INDEX 75 THROUGH 200 & A SMOKE DENSITY RATING OF 450).
9. ALL DECORATIVE MATERIAL PROVIDED AND/OR INSTALLED BY THE GENERAL CONTRACTOR SHALL BE MADE FROM NON-FLAMMABLE MATERIALS OR TREATED WITH FLAME RETARDANT AS APPROVED BY THE LOCAL FIRE MARSHAL.
10. GC SHALL PROVIDE PORTABLE FIRE EXTINGUISHERS PER LOCAL FIRE MARSHAL. GENERAL CONTRACTOR TO INSTALL.
11. BUILDING ADDRESS NUMBERS SHALL BE MINIMUM 4" HIGH, COLOR TO BE CONTRAST TO BACKGROUND, PER CITY ORDINANCE AND LANDLORD STANDARDS.
12. ANY TIME THE BUILDING IS OCCUPIED, THE MEANS OF EGRESS SHALL BE ILLUMINATED AT AN INTENSITY OF NOT LESS THAN 1 FOOT-CANDLE AT THE FLOOR LEVEL.
13. PROVIDE EXIT SIGNS FOR EGRESS IDENTIFICATION PER 2018 INTERNATIONAL BUILDING CODE.
14. PROVIDE APPROVED EGRESS ILLUMINATION AND ILLUMINATED EXIT SIGNS PER 2018 INTERNATIONAL BUILDING CODE (REFER TO ELECTRICAL DRAWINGS).
15. GC TO BE AWARE OF ALL LANDLORD REQUIREMENTS AS OUTLINED IN EXHIBIT "C" PRIOR TO START OF WORK.
16. ALL ROOF PENETRATIONS SHALL BE PERFORMED BY LANDLORD'S ROOFER.
17. GC TO PROVIDE PRECAUTIONS SUCH AS FIRE EXTINGUISHERS, FIRE APPARATUS, ACCESS, ETC DURING CONSTRUCTION TO MAINTAIN FIRE PROTECTION AND SAFETY. IFC 3304
18. PROVIDE FIRE EXTINGUISHERS AS SUBMITTED. FIRE EXTINGUISHERS SHALL BE LOCATED WITH NOT MORE THAN 75 FEET OF TRAVEL DISTANCE. FIRE EXTINGUISHERS SHALL BE ATTACHED TO THE WALL, IN AN UNOBSTRUCTED LOCATION AND SHALL BE A MINIMUM SIZE AND RATING OF 2A10BC. IFC 906.3. ADDITIONALLY, ONE CLASS K PORTABLE FIRE EXTINGUISHER REQUIRED WITHIN 30 FEET OF COMMERCIAL COOKING EQUIPMENT. IFC 901.12.5 (CONFIRM LOCATION WITH GC)
19. PRIOR TO FINAL INSPECTION, A DOOR KEY WILL NEED TO BE GIVEN TO THE FIRE MARSHAL TO BE PLACED IN THE KEY LOCK BOX LOCATED IN THE BUILDING.

SCOPE OF WORK

FINISH OUT OF AN INTERIOR SPACE TO ACCOMMODATE A FREEBIRD WORLD BURRITO.

INDEX

A0.0	COVER SHEET
ARCHITECTURAL:	
A0.1	OCCUPANCY AND EGRESS FLOOR PLAN
A0.2	ARCHITECTURAL SITE PLAN
AR.1	GENERAL ACCESSIBILITY
AR.2	GENERAL ACCESSIBILITY
A1.0	DIMENSIONED FLOOR PLAN
A1.1	NOTED FLOOR PLAN
A1.2	FLOOR FINISH PLAN
A1.3	DIMENSIONED REFLECTED CEILING PLAN
A1.5	ENLARGED RESTROOM PLAN AND ELEVATIONS
A3.0	INTERIOR ELEVATIONS
A4.0	DETAILS
FS.1	KITCHEN EQUIPMENT
FOOD SERVICE:	
COVER	FOOD SERVICE EQUIPMENT COVER SHEET
FS-0	FOOD SERVICE EQUIPMENT GENERAL NOTES
FS-1	FOOD SERVICE EQUIPMENT PLAN
FS-1.1	FOOD SERVICE EQUIPMENT ELEVATIONS
FS-2	FOOD SERVICE PLUMBING PLAN
FS-2.1	FOOD SERVICE DRAIN PLAN
FS-3	FOOD SERVICE ELECTRICAL PLAN
FS-4	FOOD SERVICE WALL BACKING PLAN
FS-5	FOOD SERVICE CRITICAL DIMENSIONS PLAN
FS-6	FOOD SERVICE WALL PANEL PLAN
ELECTRICAL:	
E1.0	ELECTRICAL KITCHEN EQUIPMENT ROUGH-IN PLAN
E1.1	ELECTRICAL LIGHTING PLAN
E1.2	ELECTRICAL POWER PLAN
E2.0	ELECTRICAL PANEL SCHEDULES & RISER
E3.0	ELECTRICAL NOTES AND SCHEDULES
E4.0	ELECTRICAL DETAILS
MECHANICAL:	
M1.0	MECHANICAL ROOF PLAN
M2.0	MECHANICAL SCHEDULES
M3.0	MECHANICAL DETAILS
M4.0-4.2	MECHANICAL HOOD DETAILS
MEP1.0	MEP SPECIFICATIONS
PLUMBING:	
P1.0	PLUMBING DWV PLAN & RISER
P1.2	PLUMBING WATER & GAS PLAN & RISER
P2.0	PLUMBING SCHEDULE AND NOTES
P3.0	PLUMBING DETAILS


CODE INFORMATION
BUILDING CODE CRITERIA

BUILDING CODE:	2018 INTERNATIONAL BUILDING CODE WITH LOCAL AMENDMENTS
ELECTRICAL CODE:	2023 NATIONAL ELECTRICAL CODE WITH LOCAL AMENDMENTS
MECHANICAL CODE:	2018 INTERNATIONAL MECHANICAL CODE WITH LOCAL AMENDMENTS
PLUMBING CODE:	2018 INTERNATIONAL PLUMBING CODE WITH LOCAL AMENDMENTS
FIRE CODE:	2018 INTERNATIONAL FIRE CODE WITH LOCAL AMENDMENTS
ENERGY CODE:	2018 INTERNATIONAL ENERGY CODE WITH LOCAL AMENDMENTS
OCCUPANCY:	A-2
CONSTRUCTION TYPE:	I-B

OWNER CONTACT
ALEJANDRO ORFANOS
4515 LYNDON B. JOHNSON FWY.
FARMERS BRANCH, TX. 75244
PHONE: 972-620-2287 EXT. 297
EMAIL: alejandro@sunholdings.net

ARCHITECTURAL
DAVID POWYSZYNSKI
CONTACT: ARMANDO PALACIOS
EMAIL: apalacios1127@gmail.com
PHONE: 214-551-0921

MECHANICAL / PLUMBING
MATTHEW T. JACKSON
PHONE:
EMAIL:
ELECTRICAL
KL ENGINEERING
PHONE: 214-649-6664
EMAIL:
CONTACT: KAU LIM

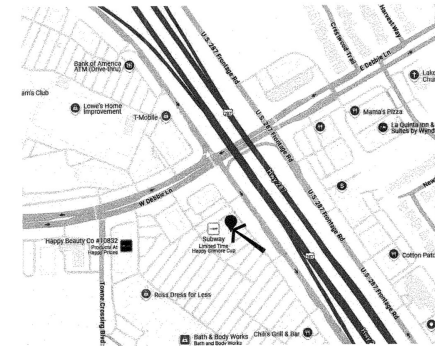

LOCATION MAP



APDesigns, L.L.C.
214-551-0921
apdesigns0127@gmail.com



FREEBIRDS
1811 HWY 287 N. STE. 100
MANSFIELD, TX. 76063

REVISIONS:	

PROJECT NUMBER:

DATE: 07-18-2025

COVER
SHEET

A0.0



- | | | D ABBREVIATIONS |
|----|--------------------------------------|-----------------|
| A. | REFER TO SHEET P0 FOR GENERAL NOTES | 4.0 EA |
| B. | REFER TO SHEET P9 FOR RISER DIAGRAMS | 1.0 EA |
| C. | REFER TO SHEETS P4 FOR DETAILS | 2.0 EA |
| D. | REFER TO SHEET P5 FOR SCHEDULES | 4.0 EA |
| | | 1.0 EA |
| | | 9.0 EA |
| | | 1.0 EA |
| | | 1.0 EA |

KEYED NOTES:

- | | | |
|--|---|--|
| <p>ROUTE NEW VENT LINE UP TO NEW VTR. COORDINATE ROOF PENETRATION LOCATION WITH OUTDOOR AIR INTAKE OF ROOFTOP EQUIPMENT. MAINTAIN A MINIMUM HORIZONTAL CLEARANCE OF 10' TO MECHANICAL AIR INTAKES. COORDINATE ANY ROOF PENETRATIONS WITH LAND/GRID REPRESENTATIVE.</p> | <p>INDIRECT DRAIN RECEPTACLE FOR WALK-IN COOLER CONDENSATE. PROVIDE WITH FLUKE TAP.</p> | <p>INDIVIDUAL COMPARTMENT DRAINS SHALL BE ROUTED SEPARATELY TO FLOOR SINK WITH AIR GAP. LINES SHALL BE SECURELY FASTENED WITH NECESSARY STRAPS AND BRACKETS. REFERENCE FLOOR SERVICE EQUIPMENT PLANS AS REQUIRED. REFERENCE FLOOR SERVICE PLANS.</p> |
| <p>CONNECT NEW SANITARY WASTE LINE TO EXISTING SANITARY MAIN. VERIFY LOCATION, SIZE & INVERT ELEVATIONS PRIOR TO BEGINNING ANY WORK.</p> | <p>250 GALLON HYDROMECHANICAL GREASE TRAP (GT-1) SIMILAR TO SCHER (8-25) AND SAMPLE WELL (DW-1) SIMILAR TO SCHER 50-24 INSTALLED AT BACK OF BUILDING. COORDINATE LOCATIONS AND CONNECTION TO SANITARY SEWER BUILDING DRAIN. ROUTE VENT PIPING BELOW GRADE AND CONNECT TO VENT SYSTEM ABOVE GRADE.</p> | <p>ROUTE DRAINS FROM WATER HEATERS TO FLOOR SINK WITH AIR GAP.</p> |
| <p>CONNECT NEW GREASE PIPING TO NEW GREASE TRAP. FIELD VERIFY SIZE, LOCATION, CONDITION, AND INVERT PRIOR TO ANY WORK.</p> | | <p>EXISTING MOUNTING TO DISCONNECTED FROM SANITARY SEWER SYSTEM AND CONNECTED TO NEW GREASE WASTE SYSTEM. OWNER AND CONTRACTOR TO DETERMINE CONDITION OF EXISTING FIXTURE FOR REFURBISHMENT, REUSE, OR REPLACEMENT.</p> |
| | | <p>EXISTING FUTURE TO REMAIN.</p> |

- (1/2" Dia) Fresh (Cold) Water Pipe
- (3/4" Dia) Fresh (Cold) Water Pipe
- (1/2" Dia) Cold Water Pipe
- (3/4" Dia) Cold Water Pipe
- (1 1/4" Dia) Cold Water Pipe
- (1" Dia) Cold Water Pipe
- (1/2" Dia) Hot Water Pipe
- (1" Dia) Hot Water Pipe
- (3/4" Dia) Hot Water Pipe
- (3/4" Dia) Hot Water Recirculating Pipe
- (1" Dia) Gas Pipe
- (1 1/2" Dia) Gas Pipe
- (3/4" Dia) Gas Pipe
- Reduced Pressure Zone Backflow Preventer
- (1/2" Dia) 90 Degree Elbow
- (3/4" Dia) 90 Degree Elbow
- (1" Dia) 90 Degree Elbow
- (1 1/4" Dia) 90 Degree Elbow
- (1 1/2" Dia) 90 Degree Elbow
- (1"x1"x1") Tee
- (1"x3/4"x1") Tee
- (1"x1/2"x1") Tee
- (1/2"x1/2"x1/2") Tee
- (1"x1/2"x1/2") Tee
- (1/2"x1/2"x3/4") Tee
- (1 1/4"x1 1/4"x3/4") Tee
- (1 1/4"x3/4"x1 1/4") Tee
- (1 1/4"x3/4"x1") Tee
- (1"x1"x1 1/2") Tee
- P-1
- WH-1

- 64.5 FT
- 32.3 FT
- 44.8 FT
- 38.4 FT
- 11.3 FT
- 18.4 FT
- 55.7 FT
- 54.2 FT
- 1.5 FT
- 8.8 FT
- 43.2 FT
- 21.4 FT
- 13.8 FT
- 1.0 EA
- 7.0 EA
- 11.0 EA
- 13.0 EA
- 1.0 EA
- 2.0 EA
- 5.0 EA
- 2.0 EA
- 3.0 EA
- 4.0 EA
- 2.0 EA
- 2.0 EA
- 3.0 EA
- 3.0 EA
- 1.0 EA
- 1.0 EA
- 3.0 EA
- 1.0 EA


NOTES:

- OR GENERAL NOTES, SYMBOLS, AND ABBREVIATIONS
- OR RISER DIAGRAMS
- OR DETAILS
- OR SCHEDULES

KEYED NOTES:

- CONNECT NEW 1-1/4" CW LINE TO EXISTING CW MAIN ABOVE CEILING. FIELD VERIFY SIZE, LOCATION, AND CONDITION PRIOR TO ANY WORK.
- PROVIDE NEW REDUCED PRESSURE ZONE BACKFLOW PREVENTER (RPZ) MOUNTED AT MAXIMUM 5' A.F.F. WITH FULL SIZE RELIEF DRAIN ROUTED TO MOP SINK W/ AIR GAP. IF STATIC PRESSURE EXCEEDS 80 PSI, PROVIDE PRESSURE REDUCING VALVE UPSTREAM OF RPZ.
- ROUTE 1/2" HW & CW TO HAND WASHING FIXTURE WITH THERMOSTATIC MIXING VALVE (TMV) SET TO MAXIMUM DISCHARGE TEMP AT 110°F.
- ROUTE 1/2" HW & CW TO LAVATORY (LAV) FIXTURE WITH THERMOSTATIC MIXING VALVE (TMV) SET TO MAXIMUM DISCHARGE TEMP AT 110°F. HW LOOP (SOURCE) PIPING SHALL ROUTE TO WITHIN 2' OF FIXTURE PER IECC TABLE C404.5.1
- 1/2" CW & HW SUPPLY LINES DOWN IN WALL TO FIXTURE.
- NATURAL GAS PIPING DOWN THROUGH ROOF. PROVIDE PENETRATION SEALING PER LANDLORD REQUIREMENTS.
- ROUTE 3/4" CW SUPPLY LINES TO BAG-IN-BOX CARBONATOR FILTRATION SYSTEM PER MANUFACTURER SPECIFICATIONS.
- ROUTE CW SUPPLY LINES TO APPLIANCE FILTRATION SYSTEM PER MANUFACTURER SPECIFICATIONS.
- NO PIPING SHALL BE INSTALLED ABOVE THE PROPOSED LOCATION OF INTERIOR ELECTRICAL PANELS.
- ROUTE GAS SUPPLY LINE TO APPLIANCE W/ SHUT-OFF VALVE, SEDIMENT TRAP, COMMERCIAL GRADE FLEXIBLE CONNECTOR, QUICK DISCONNECT FITTING, AND RESTRAINING CABLE.
- ROUTE FW LINE FROM WATER FILTRATION TO BAG-IN-BOX CARBONATOR WITH REDUCED PRESSURE ZONE (RPZ) BACKFLOW PREVENTER.
- ROUTE FW LINE FROM FILTRATION SYSTEM TO EQUIPMENT PER KITCHEN PLANS. CONNECT FILTERED WATER TO EQUIPMENT PER MANUFACTURER'S INSTALLATION REQUIREMENTS. PROVIDE WITH DUAL CHECK VALVE (DCV).
- ROUTE (2) 1" PVC CONDUITS FROM ABOVE CEILING DOWN INSIDE WALL AND TO BEVERAGE STATION WITH LONG-SWEEP ELBOWS. FOR ROUTING OF SYRUP BUNDLES AND FILTERED WATER LINES, REFERENCE FOOD SERVICE EQUIPMENT PLANS.
- ROUTE 3/4" FW LINE FROM APPLIANCE FILTRATION SYSTEM PER KITCHEN PLANS. PROVIDE WITH DUAL CHECK VALVE.
- ALL WATER PIPING IN THE COOKLINE WALL WITHIN 18" OF THE TYPE 1 EXHAUST HOOD SHALL BE INSTALLED AS RIGID COPPER PIPE, NO PLASTIC TUBING ALLOWED.
- TANKLESS GAS WATER HEATERS, PROVIDE EXHAUST AND COMBUSTION AIR UP TO CONCENTRIC VENT THROUGH ROOF. SEE DETAIL FOR PIPING REQUIREMENTS.
- EXTEND GAS LINE TO ROOFTOP MECHANICAL EQUIPMENT. PROVIDE WITH SHUT-OFF VALVE, SEDIMENT TRAP, AND FLEXIBLE CONNECTION AT UNIT PER LOCAL CODE.



1 PLUMBING WATER & GAS PLAN
1/4" = 1'-0"

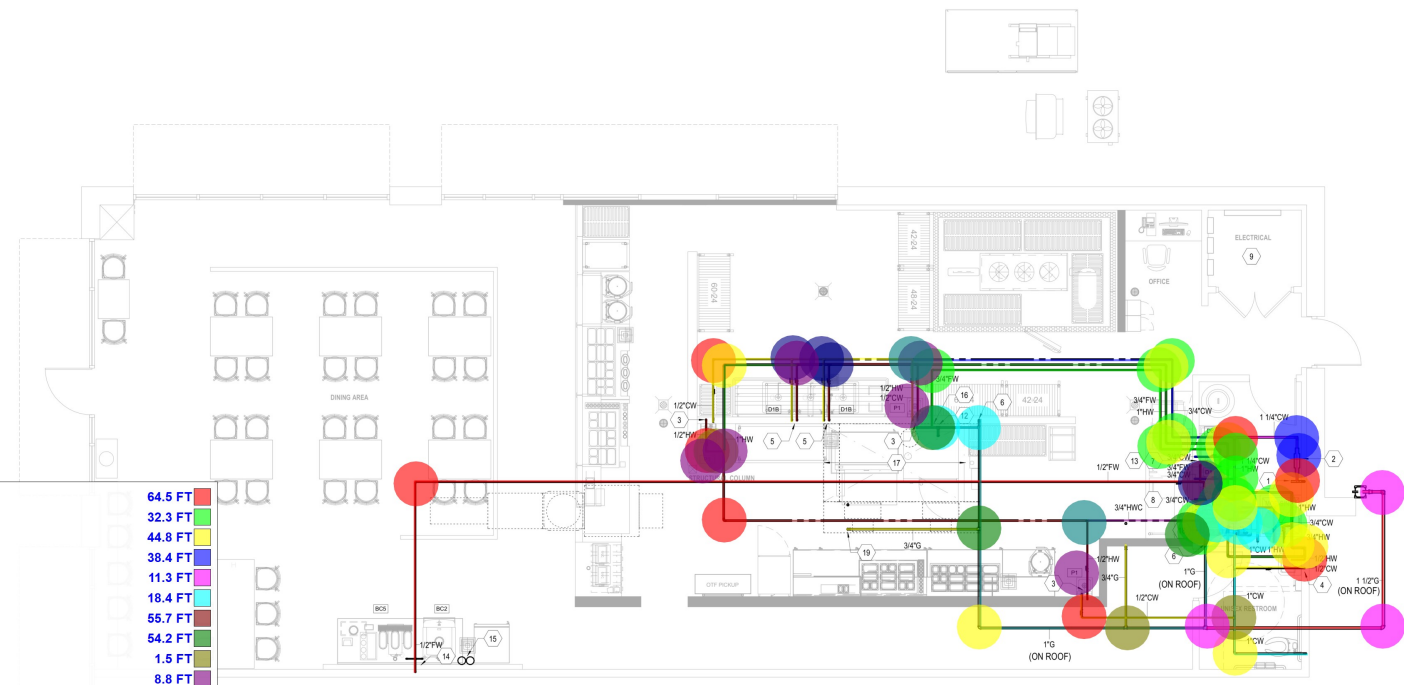


- 1/2" Dia) Fresh (Cold) Water Pipe
- 1/2" Dia) Cold Water Pipe
- 1/2" Dia) Hot Water Pipe
- 1" Dia) Cold Water Pipe
- 1" Dia) Hot Water Pipe
- 3/4" Dia) Cold Water Pipe
- 3/4" Dia) Fresh (Cold) Water Pipe
- 3/4" Dia) Hot Water Pipe
- 1 1/4" Dia) Cold Water Pipe
- 3/4" Dia) Hot Water Recirculating Pipe
- 3/4" Dia) Gas Pipe
- 1 1/2" Dia) Gas Pipe
- 2" Dia) Vent Pipe
- 4" Dia) Vent Pipe
- 4" Dia) Grease Waste Pipe
- 3" Dia) Grease Waste Pipe
- 2" Dia) Sanitary Sewer Pipe
- 2" Dia) Grease Waste Pipe

7.8 FT	
38.9 FT	
31.1 FT	
21.8 FT	
30.2 FT	
23.3 FT	
15.1 FT	
7.9 FT	
13.0 FT	
6.7 FT	
12.3 FT	
21.0 FT	
115.3 FT	
3.2 FT	
5.1 FT	
29.4 FT	
5.0 FT	
9.8 FT	

1 DOMESTIC WATER RISER

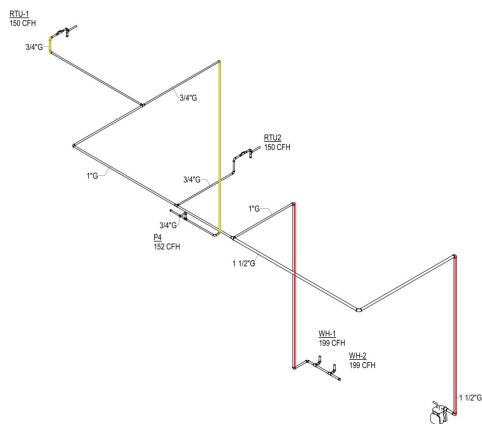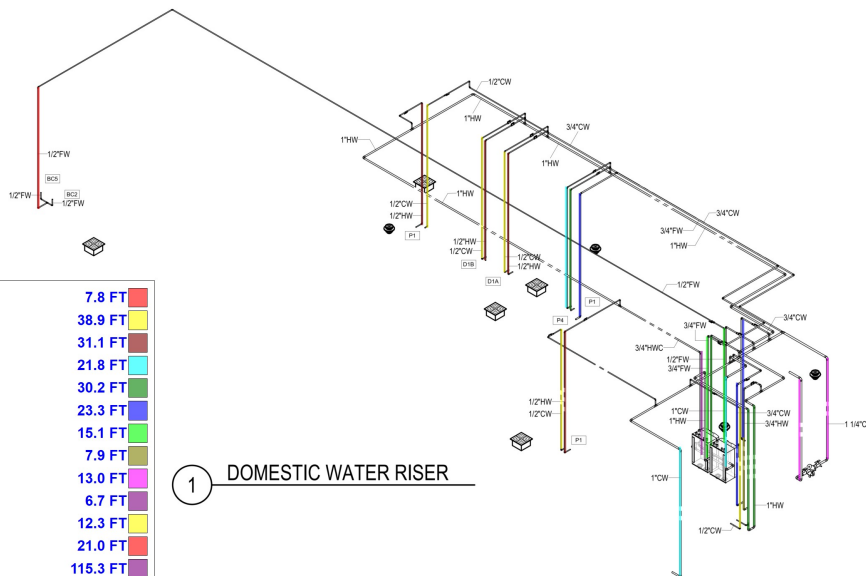

3 NATURAL GAS RISER

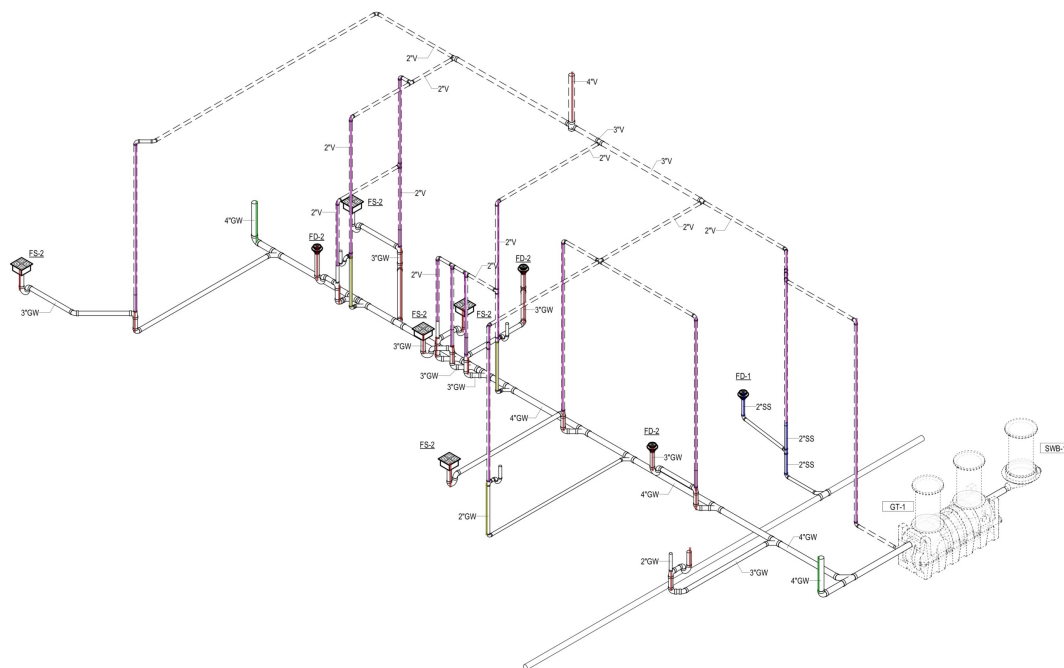

2 SANITARY WASTE AND VENT RISER